
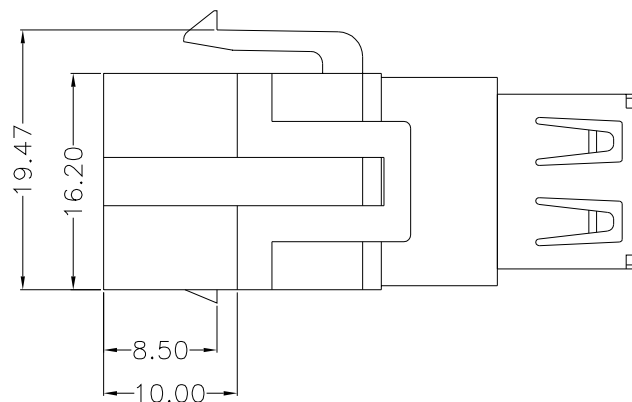
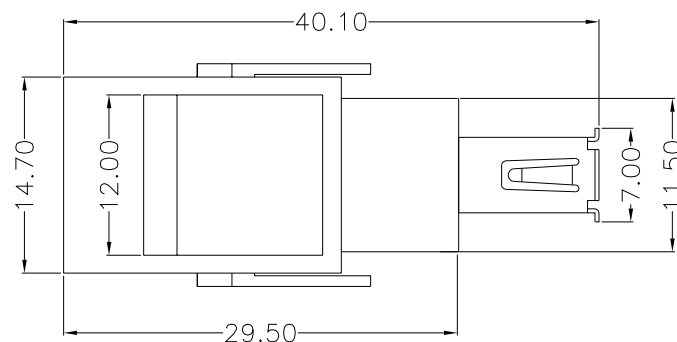


MECHANICAL:

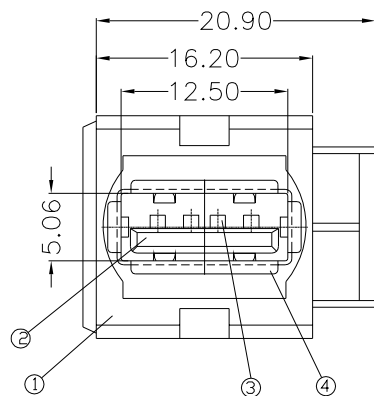

NOTE:

- 1.1 Contact resistance: 30 MΩ Max
- 1.2 Insulation resistance: 1000 MΩ Min
- 1.3 Dielectric voltage: 500V AC one sec levelin
- 1.4 Operating temperature: -55°C~-105°C
- 1.5 Total mating force: 3.5 Kgf Max.
- 1.6 Total unmating force: 1.0 Kgf Min.

3	SHELL	SPCC	T=0.30	Ni 80U"
3	TERMINAL	C5191	T=0.25	Au:G/F Ni: 40u" Sn:100u"
2	HOUSING	PBT	—	White
1	HOUSING	ABS	—	White
NO.	PART NAME	MATERIAL	THICK	FINISH

HULYN

深圳惠興力電子有限公司
SHEN ZHEN HUILY ELECTRONICS CO.,LTD.

A0	RELEASED	Peng	08/12-20
REV	DESCRIPTION.	APPD.	Date

FILE NO : HZ(Series)

TOLERANCE(公差):
0.000 mm ± 0.10 mm
0.00 mm ± 0.25 mm
0.0 mm ± 0.30 mmTITLE
圖 名KEYSTONE USB2.0转接头
AF TO AFUNIT
單位mm
inchPART NO.
料 號

HZ-U2-AFAF-013

SCALE
比例

1 : 1

DRAWN BY
製 圖

Peng

DATE
日 期

2020-12-08

REV.
版本

A.0

CHECKED BY
審 核

Zhu

DATE
日 期

2020-12-08

