
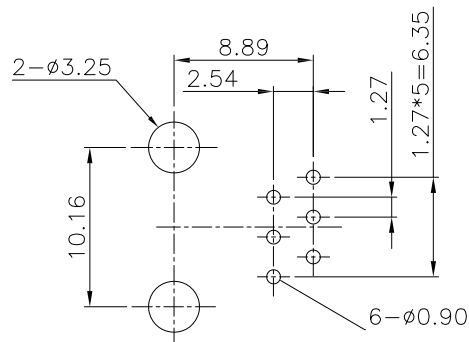
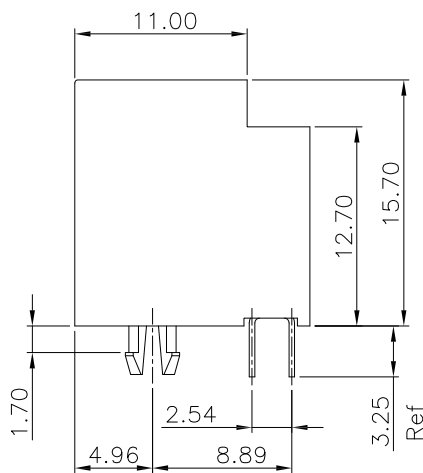
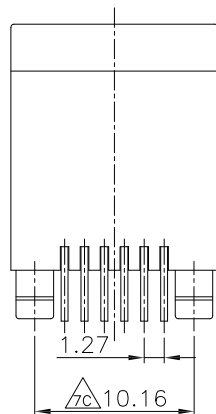


MECHANICAL:



PCB LAYOUT/TOP VIEW

SPECIFICATION NOTES:

ELECTRICAL:

- VOLTAGE RATING: 125 VAC RMS
- CURRENT RATING: 1.5 AMP
- CONTACT RESISTANCE: 30mΩ MAX.
- INSULATION RESISTANCE: 500MΩMIN. AT 500V DC.
- DIELECTRIC STRENGTH: 1000 VAC 50Hz 1MINUTE

MECHANICAL:

- HOUSING/INSERT MATERIAL:
THERMOPLASTIC, PBT UL94V-0,COLOR BLACK
- CONTACT MATERIAL:PHOSPHOR BRONZE T=0.35mm
- PLATING:GOLD PLATING OVER NICKEL, PLATED NICKEL 30-50". SN 100-120U. GOLD PLATED ON CONTENT AREA 1U/3U/6U/15U/30U"
- OPERATING LIFE:750 CYCLES MIN.

ENVIRONMENTAL:

- STORAGE:-40° C TO +85° C
- OPERATION: 0° C TO 75° C

Part Number:

HR5229-1166N X 1 B-1 R

Electroplating:
1=1U金 3=3U金
4=6U金 5=15U金
6=30U金 7=50U金

Material:
1=PBT 2=PA46
3=PA66 4=PA9T 5=LCP

Colour:
B=黑色 G=绿色 R=红色 Y=黄色
V=紫色 W=白色 H=灰色 L=蓝色

environmental protection:
R=Rohs Free
H=Halogen Free

Packing:
1=Tray
2=Tape Reel

HULYN

深圳惠興力電子有限公司
SHEN ZHEN HUILY ELECTRONICS CO.,LTD.

A0	RELEASED	Peng	20/12-19
REV	DESCRIPTION.	APPD.	Date

FILE NO :HR5229(Series)		TITLE 圖 名		RJ11 Vertical,1X1 Port,Tht		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.10 mm 0.00 mm ± 0.25 mm 0.0 mm ± 0.30 mm		PART NO. 料 號		HR5229 -1166N11B-1R		SCALE 比例	1:1
		DRAWN BY 製 圖		Peng	DATE 日 期	2019-12-20	REV. 版本
		CHECKED BY 審 核		Zhu	DATE 日 期	2019-12-20	

A

B

C

D

Page: 1 of 1

6

HTTP://www.huilyn.com