

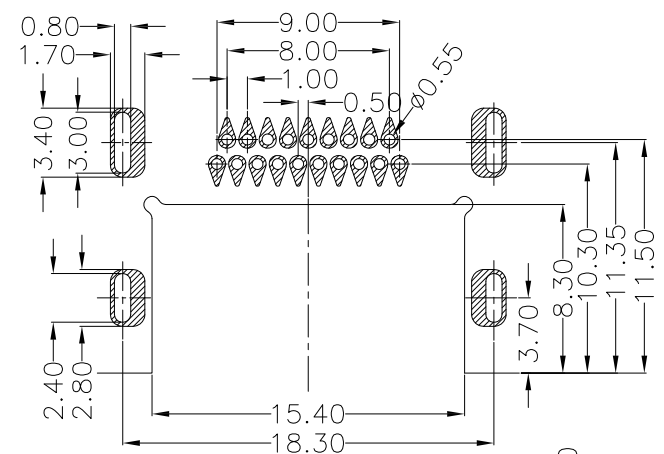
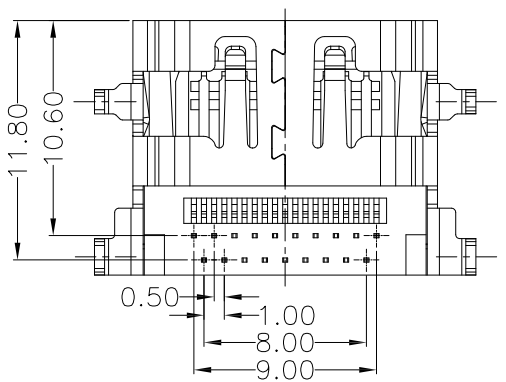
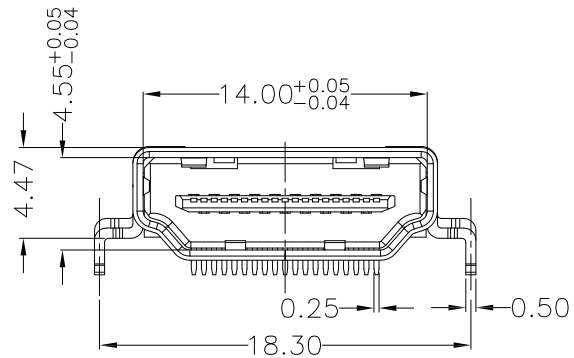
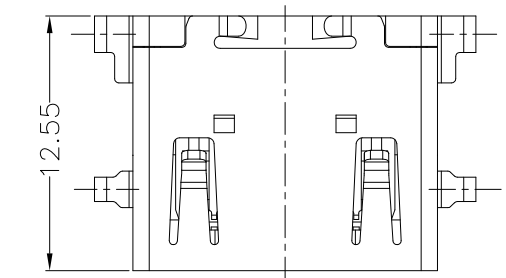


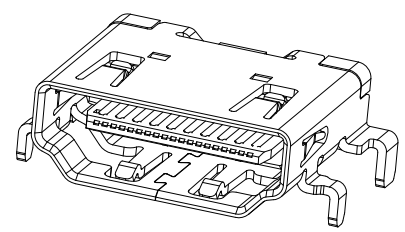

RECOMMEND PCB LAYOUT
TOLERANCE:±0.05MM

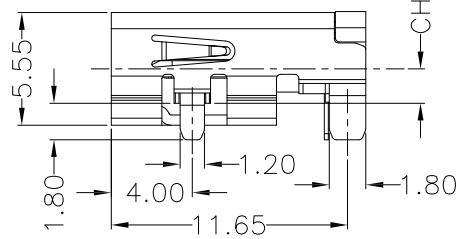

NOTES:

1. MATERIAL:
HOUSING--HIGH TEMP THERMAL PLASTIC, UL 94V-0, BLACK;
TERMINAL--COPPER ALLOY;
SHELL--COPPER ALLOY;
2. PLATING:
TERMINAL--GOLD FLASH PLATING ON CONTACT AREA
GOLD FLASH ON SOLDER TAIL AREA
ALL OVER 1.27 MICRON MIN. NICKEL PLATING;
SHELL--NICKEL OR G/F SELECTIVE PLATING OVER ALL;

Ordering Information

H160-FC02-1 X X B X - X X

Shell

1=Iron Alloy Ni Plating
2=Iron Alloy Au Plating
3=Copper Alloy Ni Plating
4=Copper Alloy Au Plating

Plastic material

E=LCP

Electroplating


0=FU/Tin
2=30u"金/Tin
3=50u"金/Tin
4=100u"金/Tin
5=150u"金/Tin
6=300u"金/Tin

Packing

B=TUBE
C=TRAY
D=TAPE REEL
E=TAPE REEL+MYLAR

Environmental protection

H=Halogen
R=ROHS

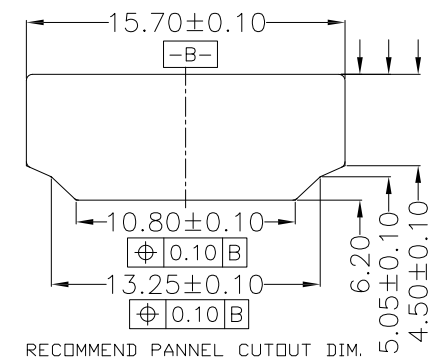

RECOMMEND PANNEL CUTOUT DIM.

A0	RELEASED	Peng	18/12-19
REV	DESCRIPTION.	APPD.	Date

HULYN 深圳惠興力電子有限公司 SHEN ZHEN HUILY ELECTRONICS CO.,LTD.			
FILE NO : H160(Series)		TITLE 圖 名	
TOLERANCE(公差): 0.000 mm ± 0.10 mm 0.00 mm ± 0.25 mm 0.0 mm ± 0.30 mm		HDMI A TYPE DIP R/A CH=1.7	
		UNIT 單位	
		mm inch	
		PART NO. 料 號	
		H160-FC02-13EB0-DR	
		SCALE 比例	
		1:1	
		DRAWN BY 製 圖	
		Peng	
		DATE 日 期	
		2019-12-31	
		REV. 版本	
		A.0	
		CHECKED BY 審 核	
		Zhu	
		DATE 日 期	
		2019-12-31	